

COMBi-MG

The Combi-MG Mobile Gantry is the perfect solution for handling and conveying extremely large loads typical of industries such as shipping, aerospace, wind turbine, large scale civil industry, precast concrete and large scale structural steel industries.


COMBiLiFT

LIFTING INNOVATION




COMBi-MG


FRONTAL MODE

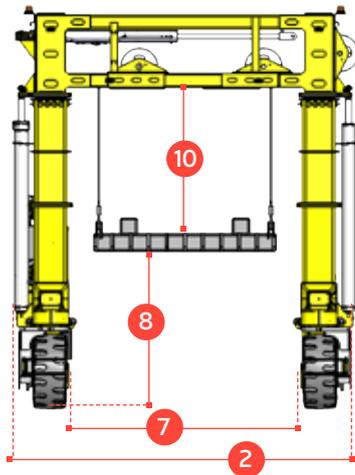

SiDEWARD MODE

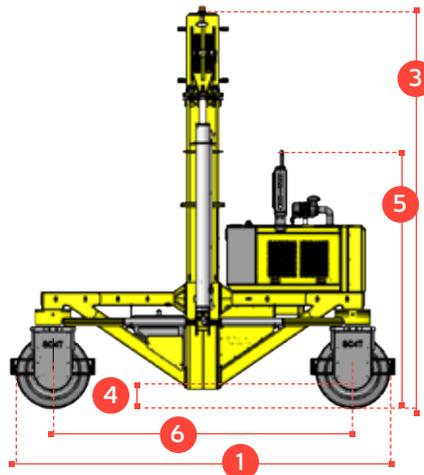

TURniNG RADIUS

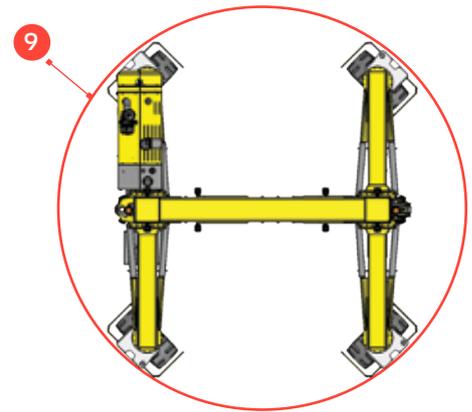

Highly customisable to fit any load handling challenge. The Combi-MG is highly adaptable to your needs and can be built to dimensions specifically to suit your application. It can be fitted with a very wide range of lifting accessories to suit any application or industry. The Combi-MG can be equipped with a rotating C-hook for handling coils, which can be operated to roll in both directions and in manual and automatic operation. With capacities ranging from 80 tonne, it's a safe choice to go with the Combi-MG.

STANDARD BUILD *CUSTOMISATION AVAILABLE		METRIC		IMPERIAL	
		MG	MG-T	MG	MG-T
REF.	DESCRIPTION	TRAILER TO GROUND	TELESCOPIC HIGHER LIFT STROKE	TRAILER TO GROUND	TELESCOPIC HIGHER LIFT STROKE
1	Overall Length	5000mm		29' 6"	197"
2	Overall Width	4400mm		16' 9"	172"
3	Overall Height	5500mm	5500mm - 7300mm	17' 6"	217" - 287"
4	Ground Clearance under Side Section	275mm		9½"	11"
5	Height Over Engine	2700mm		80½"	106"
6	Wheelbase	4150mm		151½"	163"
7	Width of Load Area	3000mm		227½"	118"
8	Height of Load Area	4000mm	4000mm - 5800mm	127"	157" - 228"
9	Minimum Outside Radius	6700mm		181"	264"
10	Lift Stroke	1800mm		47½"	71"
A	Capacity	20,000kg - 80,000kg		44,000lbs - 176,000lbs	
B	Unladen Weight	13,000kg		29,000lbs	
C	Gradeability	5% Fully Loaded			
D	Maximum Ground Speed	6km/h		4mph	
E	V3800 Kubota Diesel Engine	72kW		96HP	
F	Electrics	12 Volt			
G	Tyres	4 x Super Elastic Puncture Proof Tyres			
H	Standard Colour	Yellow & Gray			

Features Include:

- The RTG allows for increased storage with reduced aisle widths of just 1.5m (5')
- Available in V3800 Kubota Diesel engine and LP Gas option
- Multi-directional, 6 steering options
- Overall dimensions can be customised to suit the customers application
- Multi-Function Joystick
- Side shift 5080mm/200". Full side shift from left to right increases storage and flexibility
- Independent telescopic for maximum lift whilst also capable of passing under low heights
- Independent lift allows lifting and lowering of coil/load
- Rotating C-Hook for handling coils in both directions and rotating, manual or automatic option
- Rated lift capacity from 20t to 80t

Distributed by:

COMBILIFT HAS A POLICY OF CONTINUOUS PRODUCT DEVELOPMENT AND RESERVES THE RIGHT TO ALTER SPECIFICATIONS WITHOUT PRIOR NOTICE. SPECIFICATIONS AND/OR DIMENSIONS MAY VARY FROM THOSE ILLUSTRATED IN SOME COUNTRIES.